


AM/FM RADIO

■ GENERAL DESCRIPTION

The NJM2237 is monolithic integrated circuit in a 20-lead dual in-line plastic package designed for use in 3-6V portable AM/FM radio receivers.

The functions incorporated are AM RF amplifier, AM mixer, FM/AM IF amplifier, FM/AM detector, AM AGC circuit Audio Power amplifier.

■ PACKAGE OUTLINE




NJM2237 D

■ FEATURES

- Wide Operating Voltage (1.8~6.0V)
- Very Simple DC switching of FM/AM
- High AM signal handling
- 4Ω speaker direct drive
- Low tweet
- Most suitable to use with NJM2236
- Package Outline DIP20
- Bipolar Technology

■ BLOCK DIAGRAM

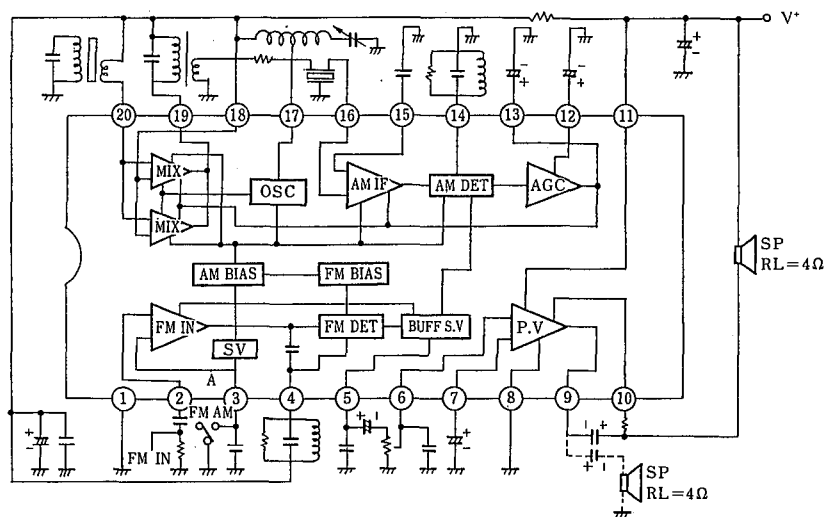

(note) Dotted line shws $V^+ = 4.5V$

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	8	V
Output Current	I _{O(peak)}	550	mA
Power Dissipation	P _D	1.2	W
Operating Temperature Range	T _{opr}	-20 ~ 75	°C
Storage Temperature Range	T _{stg}	-40 ~ 125	°C

■ ELECTRICAL CHARACTERISTICS

(V⁺ = 3V, Ta=25°C, FM: f=10.7MHz, Δf=22.5kHz dev., fm=1kHz

AM: f=1MHz, Mod=30%, fm=1kHz Unless otherwise noted)


CHARACTERISTICS	SYMBOLS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Current	I _{CC} (FM)	V _{IN} =0	—	15	20	mA
	I _{CC} (AM)	V _{IN} =0	—	15	20	
—3dB Limiting Sensitivity	V _{IN(lim)}		—	36	42	dBμ
Detection Output Voltage	V _{OD}	V _{IN} =80dBμ	22	31	44	mVrms
Signal to Noise Ratio	S/N	V _{IN} =80dBμ	—	70	—	dB
Total Harmonic Distortion	THD	V _{IN} =80dBμ	—	0.3	—	%
Am Rejection Ratio	AMR	V _{IN} =80dBμ	—	33	—	dB
Voltage Gain	G _V	V _{IN} =30dBμ	5	11	17	mVrms
Detection Output Voltage	V _{OD}	V _{IN} =66dBμ	22	31	44	mVrms
Signal to Noise Ratio	S/N	V _{IN} =66dBμ	—	46	—	dB
Total Harmonic Distortion	THD1	V _{IN} =66dBμ	—	1.5	—	%
	THD2	V _{IN} =106dBμ	—	4.0	—	
Local OSC Stop Voltage	V _{STOP}	V _{OSC} =-6dB	—	1.0	1.5	V
Voltage Gain	G _V	f=1kHz, R _L =4Ω	37	40	43	dB
Output Power	P _{OD1}	f=1kHz, R _L =4Ω, THD=10%	180	220	—	mW
	P _{OD2}	V ⁺ =4.5V f=1kHz, R _L =4Ω, THD=10%	—	500	—	
Total Harmonic Distortion	THD	f=1kHz, R _L =4Ω, P _O =50mW	—	0.5	20	%
Output Noise Voltage	V _{NO}	R _O =10kΩ, R _L =4Ω BW=30Hz~20kHz	—	0.18	—	mVrms

■ TERMINAL VOLTAGE AT NO SIGNAL

($V^+ = 3V$, $T_a = 25^\circ C$)





CHARACTERISTICS		SYMBOLS	TYPICAL VALUE.		UNIT.
PIN NO	FUNCTION		AT AM	AT FM	
1	GND	V_1	0	0	V
2	FM IF IN	V_2	2.4	2.0	V
3	FM/AM Switch	V_3	0	2.0	V
4	FM DET	V_4	2.9	2.9	V
5	DET OUT	V_5	0.4	0.7	V
6	PW IN	V_6	0	0	V
7	PW Bypass	V_7	0.6	0.6	V
8	PW GND	V_8	0	0	V
9	PW OUT	V_9	1.5	1.5	V
10	PW Bootstrap	V_{10}	2.8	2.8	V
11	$V^+ 1$	V_{11}	3.0	3.0	V
12	AGC1	V_{12}	0.6	0	V
13	AGC2	V_{13}	0.6	0	V
14	AM DET	V_{14}	0	0	V
15	AM Bypass	V_{15}	1.3	0	V
16	AM IF IN	V_{16}	1.3	0	V
17	AM Osc	V_{17}	2.9	2.9	V
18	$V^+ 2$	V_{18}	2.9	2.9	V
19	AM MIX OUT	V_{19}	2.9	2.9	V
20	AM RF IN	V_{20}	2.9	2.9	V

■ TEST CIRCUIT

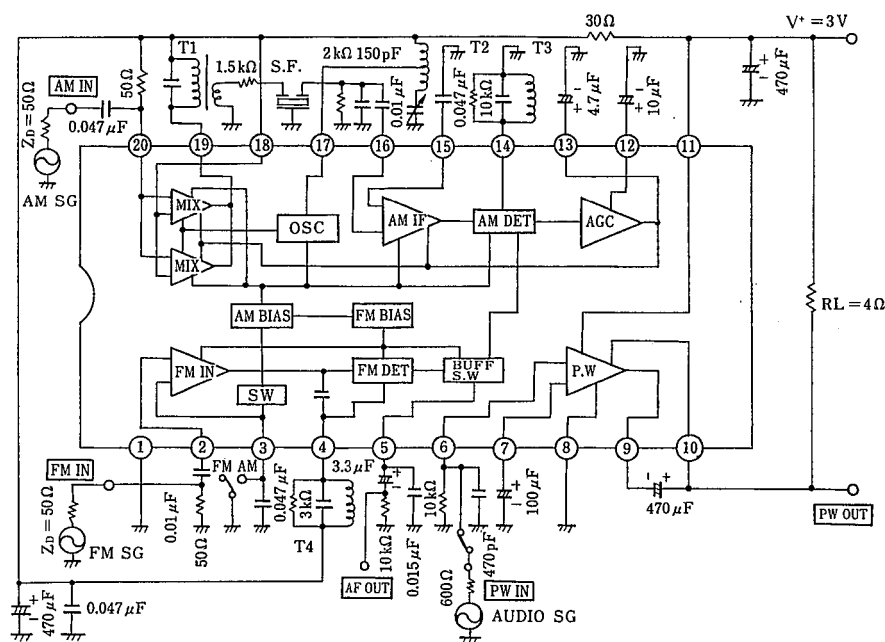

NJM2237

■ TEST CIRCUIT COIL DATA


COIL NO.	F ₀	Q ₀	URNS	C ₀	BOTTOM VIEW
T ₁ : FM IFT (MIX OUT)	455kHz	①-③ 80	①-③ 60T ④-⑥ 16T Wire : 0.09mmφ UEW SUMIDA 2150-2173-302	①-③ 1500pF	 Bottom View
T ₂ : AM OSC	796kHz	①-③ 125	①-② 15T ②-③ 89T Wire : 0.06mmφ UEW SUMIDA 2157-2239-213A	—	 Bottom View
T ₃ : AM DET	455kHz	①-③ 105	①-③ 127T Wire : 0.06mmφ UEW SUMIDA 2150-2083-061	①-③ 330pF	 Bottom View
T ₄ : FM DET	10.7MHz	①-③ 100	①-③ 10T Wire : 0.12mmφ UEW SUMIDA 2153-4095-331	①-③ 150pF	 Bottom View

INPUT OUTPUT IMPEDANCE


CHARACTERISTIC	SYMBOL	CIRCUIT	TEST CONDITION	TYP.	UNIT
Pin 2 Input Impedance (FM)	R_{IN2} C_{IN2}	1	$f=10.7\text{MHz}$	4.6 5.0	$k\Omega$ pF
Pin 20 Input Impedance (AM)	R_{IN20} C_{IN20}	2	$f=1\text{MHz}$	20 11	$k\Omega$ pF
Pin 16 Input Impedance (AM)	R_{IN16} C_{IN16}	3	$f=455\text{kHz}$	6 3.7	$k\Omega$ pF
Pin 19 Output Impedance (AM)	R_{O19} C_{O19}	4	$f=455\text{kHz}$	2.5 5.5	$k\Omega$ pF
Pin 14 Output Impedance (AM)	R_{O14} C_{O14}	5	$f=455\text{kHz}$	100 5.0	$k\Omega$ pF

TEST CIRCUIT 1 (Pin 2 FM Input Resistance, Capacitance)

4

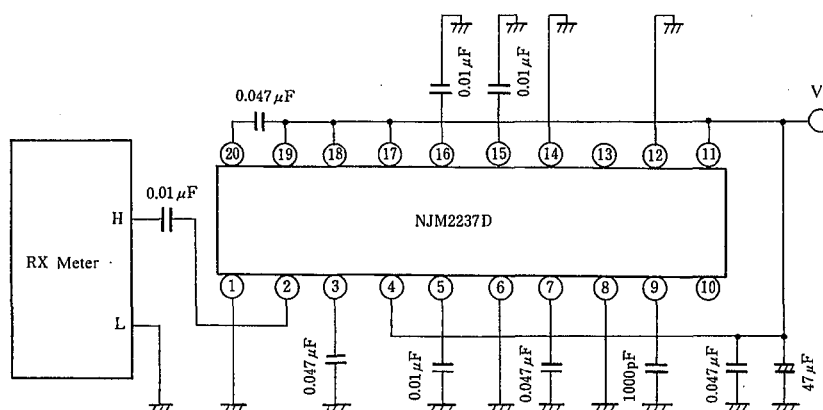

TEST CIRCUIT 2 (Pin 20 AM Input Resistance, Capacitance)

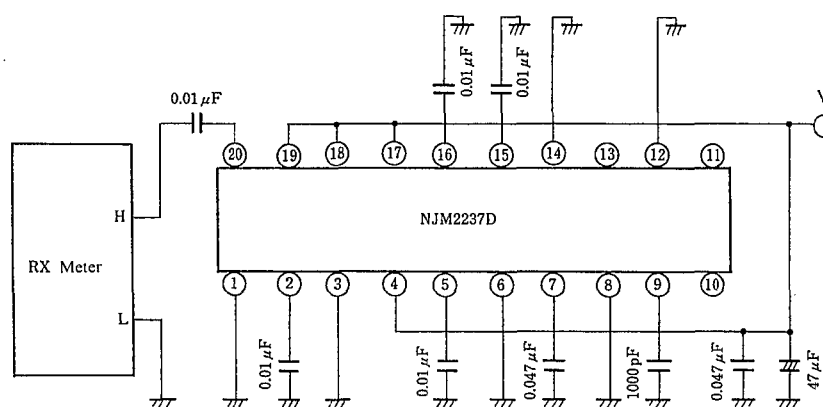

■ NOTES


1. The frequency characteristics at AM and FM mode

The output impedance of pin5 (Ro5) and external capacitor C1 decide frequency characteristics.

The value of Ro5 turns to 10kΩ at AM mode and 5kΩ at FM mode.

Accordingly should consider above, trim C1 to get proper frequency response.

Besides should design the location of C1 closer to pin1 (GND) to get low tweet.

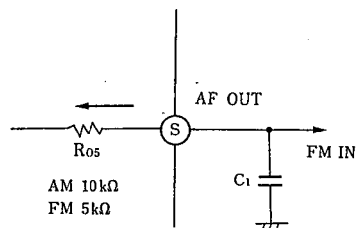

2. Loading speaker

Recommend to connect the speaker between pin11 (V*) and pin10 (bootstrap) at V* = 3V for better low supply to voltage operation.

When Vcc is above 4.5V, recommend the speaker connection between pin9 (PW OUT) and (GND) through a coupling capacitor.

3. Termination to the power stage



The audio signal of output pin5 includes carrier component slightly, therefore a capacitor between pin6 and GND have to be connected to decrease carrier component.

4. Supply voltage start-up





The supply voltage of radio circuit block should not start up before power stage start-up.

TYPICAL CHARACTERISTICS







Operating Current vs. Operating Voltage
($V_{IN}=0$)

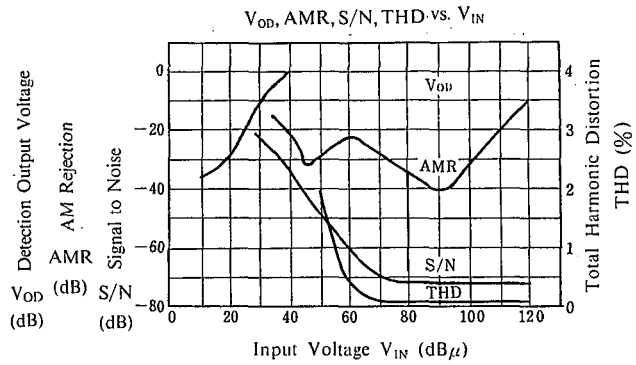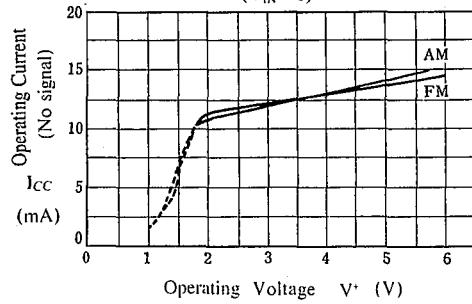

4

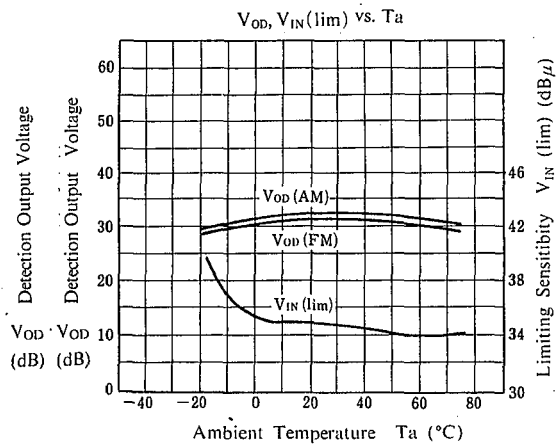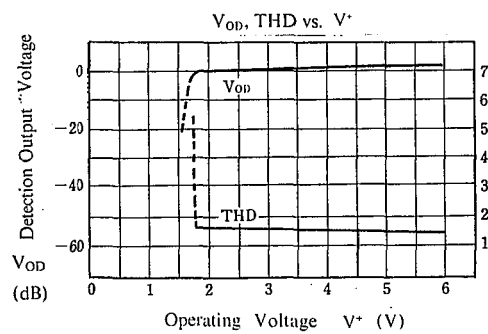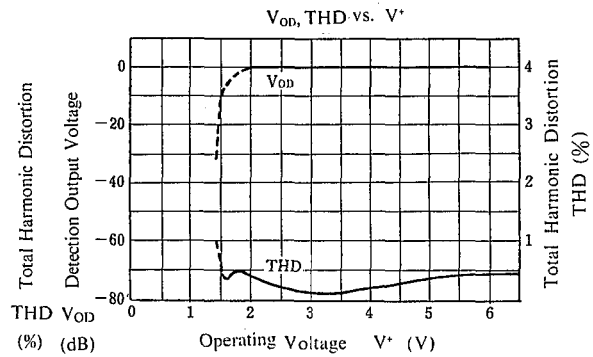
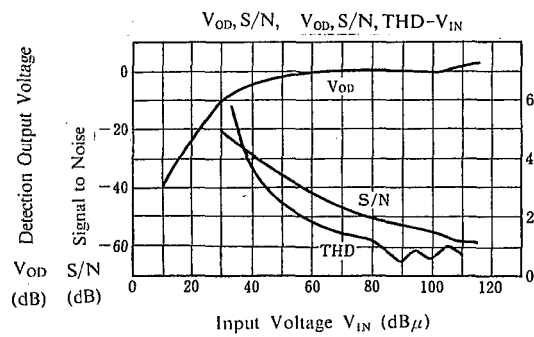


■ TYPICAL CHARACTERISTICS

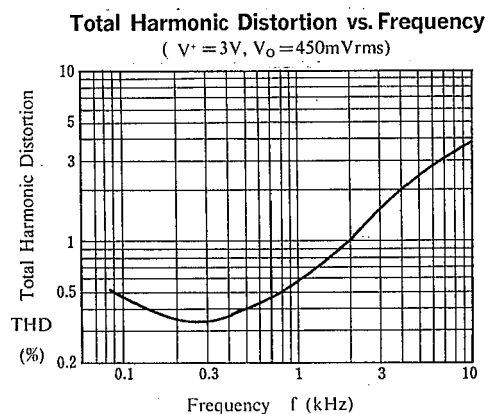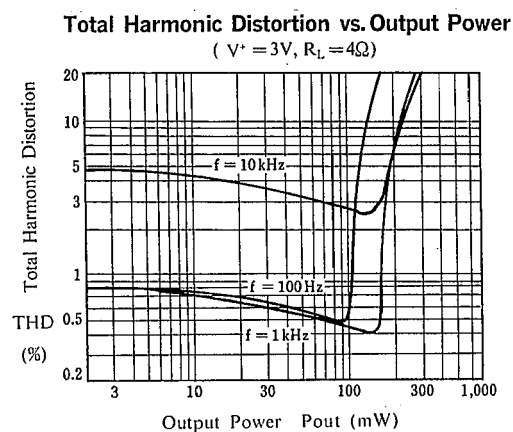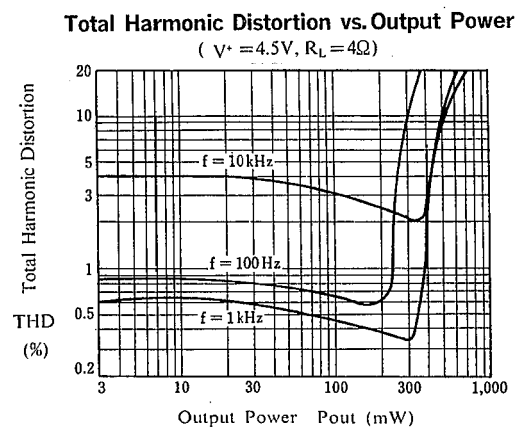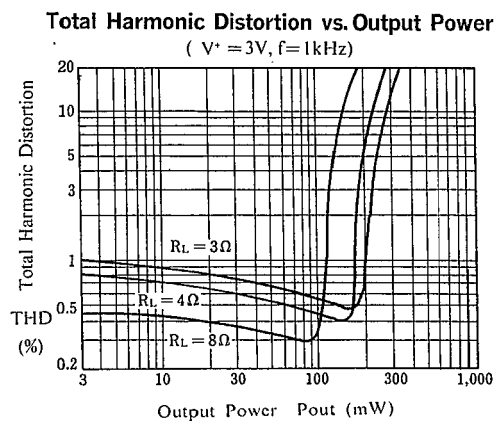
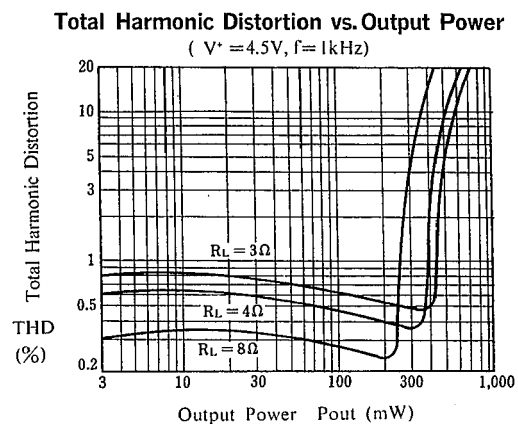
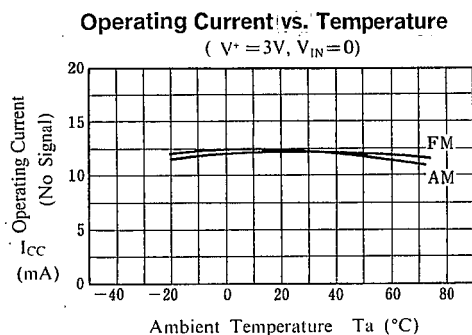


4


TYPICAL CHARACTERISTICS

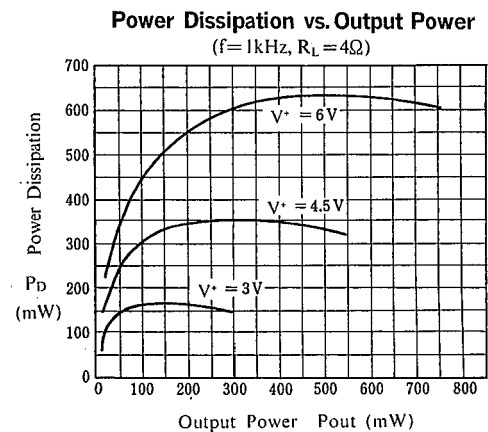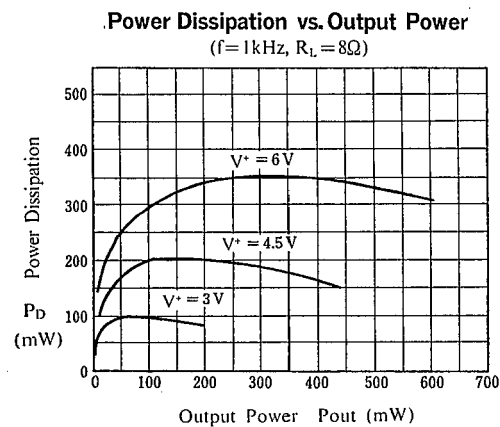

4


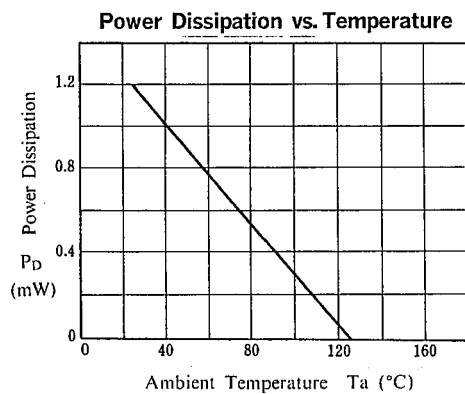
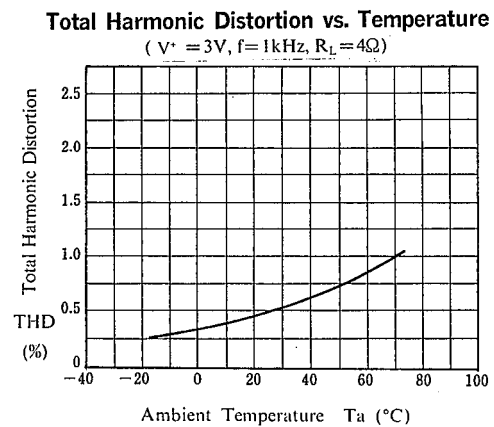
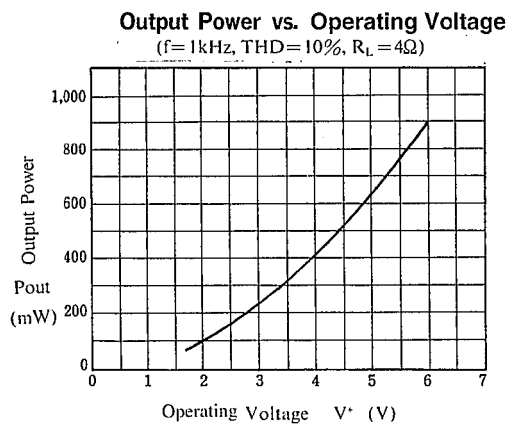


■ FM/AM RADIO APPLICATION CIRCUIT

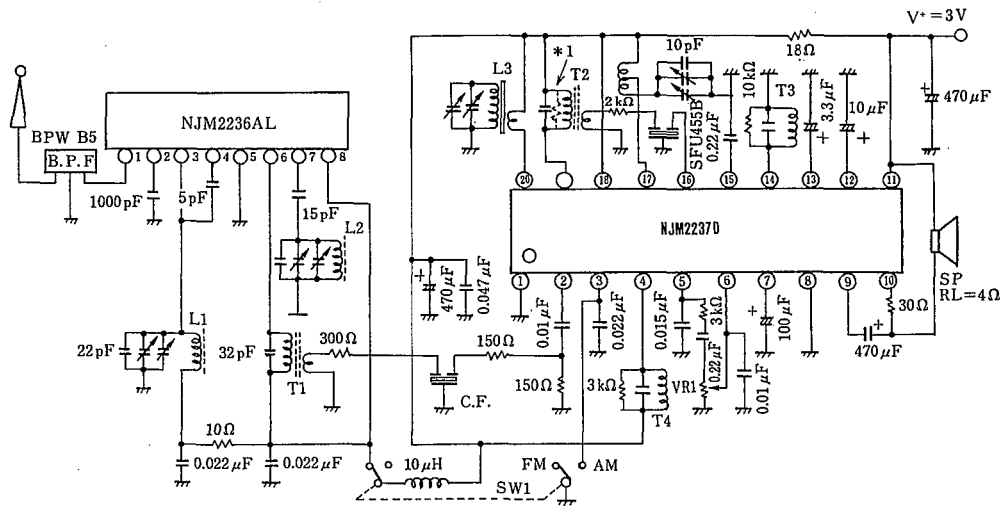

NJM2237

■ FM/AM RADIO APPLICATION CIRCUIT

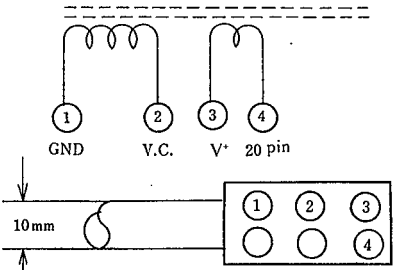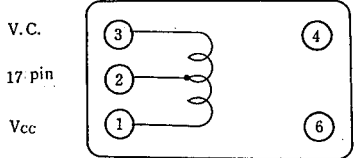COIL NO.	F ₀	Q ₀	TURNS	C ₀	BOTTOM VIEW
L ₁ : RF Coil	100MHz	100	0.7mmφ 2 $\frac{1}{4}$ T (Japan Band) SUMIDA 0295-057	22pF (ext.)	 Ferrite Core
L ₂ : OSC Coil	100MHz	100	0.7mmφ 2 $\frac{1}{2}$ T (Japan Band) SUMIDA 0295-056	30pF (ext.)	 Ferrite Core
L ₃ : AM ANT	796kHz	①-② 200	①-② 100 T L=600μH ③-④ 17 T Wire: 4/0.07mm UATC Core: 10mmφ×80mm MITUMI YI-7160-1	—	 BOTTOM VIEW
L ₄ : AM OSC	796kHz	①-③ 125	①-② 15 T ②-③ 89 T Wire: 0.06mmφ UEW SUMIDA 2157-2239-213A	—	 BOTTOM VIEW

COIL NO.	F ₀	Q ₀	TURNS	C ₀	BOTTOM VIEW
T ₁ : FM IFT	10.7MHz	①-③ 90	①-③ 11 T ④-⑥ 2 T Wire : 0.12mmφ UEW SUMIDA 2153-414-041	①-③ 82pF	
T ₂ : AM IFT	455 kHz	①-③ 80	①-③ 60 T ④-⑥ 16 T Wire : 0.09mmφ UEW SUMIDA 2150-2173-302	①-③ 1500pF	
T ₃ : AM DET	455 kHz	①-③ 105	①-③ 127 T Wire : 0.06mmφ UEW SUMIDA 2150-2083-061	①-③ 3330pF	
T ₄ : FM DET	10.7MHz	①-③ 100	①-③ 10 T Wire : 0.12mmφ UEW SUMIDA 2153-4095-331	①-③ 150pF	

NJM2237

MEMO

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.