




TURBOSWITCH™ "A". ULTRA-FAST HIGH VOLTAGE DIODE

MAIN PRODUCTS CHARACTERISTICS

I _{F(AV)}	2*30A
V _{RRM}	600V
t _{rr} (typ)	35ns
V _F (max)	1.5V

FEATURES AND BENEFITS

- SPECIFIC TO "FREEWHEEL MODE" OPERATIONS: Freewheel or Booster Diode
- ULTRA-FAST RECOVERY.
- VERY LOW OVERALL POWER LOSSES IN BOTH THE DIODE AND THE COMPANION TRANSISTOR.
- HIGH FREQUENCY OPERATIONS.


STTA6006T(V)1

STTA6006T(V)2

ISOTOP®
 (Plastic)
 Screw version (*)

DESCRIPTION

The TURBOSWITCH is a very high performance series of ultra-fast high voltage power diodes from 600V to 1200V.

TURBOSWITCH, A family, drastically cuts losses in both the diode and the associated switching IGBT or MOSFET in all "Freewheel Mode" operations and is particularly suitable and efficient

in Motor Control Freewheel applications and in Booster diode applications in Power Factor Control circuitries.

Packaged in ISOTOP, these 600V devices are particularly intended for use on 240V domestic mains.

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{RRM}	Repetitive peak reverse voltage.	600	V
V _{RSM}	Non repetitive peak reverse voltage.	600	V
I _{F(RMS)}	RMS forward current.	50	A
I _{FRM}	Repetitive peak forward current ($t_p = 5 \mu s$, $f = 5\text{kHz}$)	300	A
T _j	Max operating junction temperature.	-65 to 150	°C
T _{stg}	Storage temperature.	-65 to 150	°C

(*) : Tin plated Fast-on version is also available (without V suffix).

TM : ISOTOP and TURBOSWITCH are trademarks of SGS-THOMSON Microelectronics.

THERMAL AND POWER DATA

Symbol	Parameter	Conditions	Value	Unit
$R_{th(j-c)}$	Junction to case thermal resistance	Per diode	1.4	°C/W
		Total	0.75	
		Coupling	0.1	
P_1	Conduction power dissipation (see fig. 2)	Per diode $I_F(AV) = 30A$ $\delta = 0.5$ $T_c = 74^\circ C$	54	W
P_{max}	Total power dissipation $P_{max} = P_1 + P_3$ ($P_3 = 10\% P_1$)	Per diode $T_c = 66^\circ C$	60	W

STATIC ELECTRICAL CHARACTERISTICS (see Fig.2)

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
V_F	Forward voltage drop	$I_F = 30A$	$T_j = 25^\circ C$ $T_j = 125^\circ C$			1.75 1.5	V V
I_R	Reverse leakage current	$V_R = 0.8 \times V_{RRM}$	$T_j = 25^\circ C$ $T_j = 125^\circ C$			150 8	μA mA

Test pulses widths : * $t_p = 380 \mu s$, duty cycle < 2%** $t_p = 5 ms$, duty cycle < 2%

DYNAMIC ELECTRICAL CHARACTERISTICS

TURN-OFF SWITCHING (see Fig.3)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
t_{rr}	Reverse recovery time	$T_j = 25^\circ C$ $I_F = 0.5 A$ $I_R = 1A$ $I_{rr} = 0.25A$ $I_F = 1 A$ $dI_F/dt = -50A/\mu s$ $V_R = 30V$		35	65	ns
I_{RM}	Maximum reverse recovery current	$T_j = 125^\circ C$ $V_R = 400V$ $I_F = 30A$ $dI_F/dt = -240 A/\mu s$ $dI_F/dt = -500 A/\mu s$		20	19	A
S factor	Softness factor	$T_j = 125^\circ C$ $V_R = 400V$ $I_F = 30A$ $dI_F/dt = -500 A/\mu s$		0.40		/

TURN-ON SWITCHING (see Fig.4)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
t_{fr}	Forward recovery time	$T_j = 25^\circ C$ $I_F = 30A$, $dI_F/dt = 240 A/\mu s$ measured at, $1.1 \times V_{Fmax}$			600	ns
V_{Fp}	Peak forward voltage	$T_j = 25^\circ C$ $I_F = 30A$, $dI_F/dt = 240 A/\mu s$			12	V

APPLICATION DATA

The TURBOSWITCH "A" is especially designed to provide the lowest overall power losses in any "FREEWHEEL Mode" application (Fig.1) considering both the diode and the companion

transistor, thus optimizing the overall performance in the end application.

The way of calculating the power losses is given below:



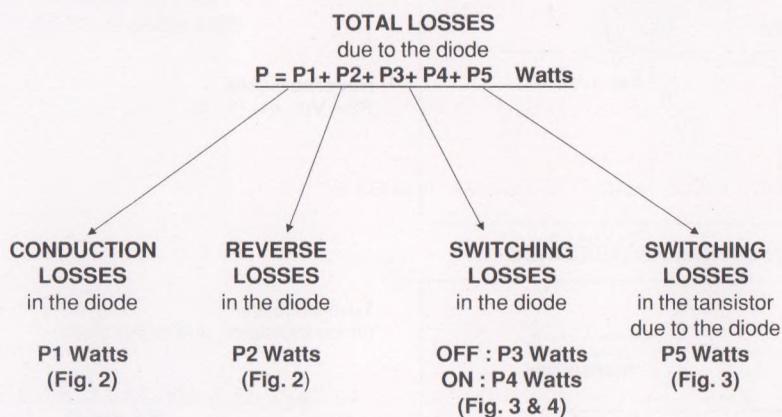


Fig. 1 : "FREEWHEEL" MODE.

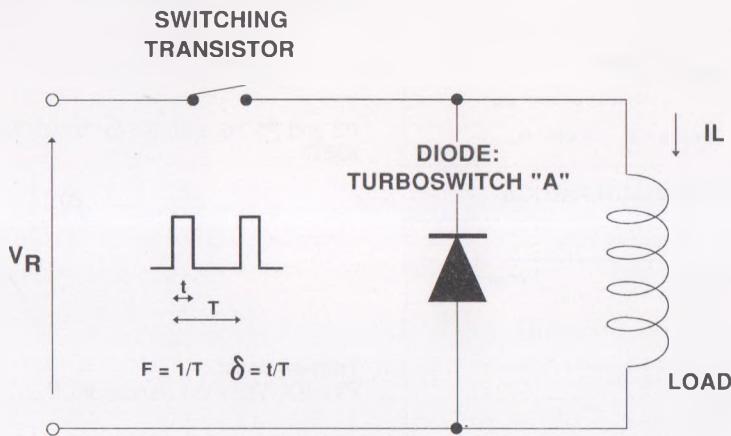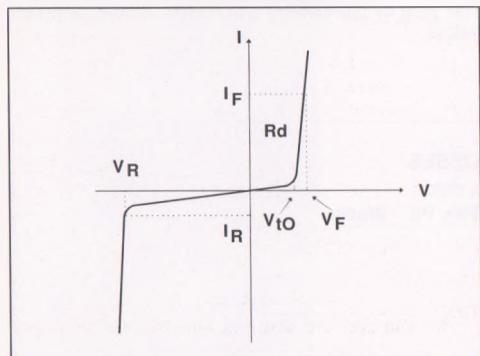

APPLICATION DATA (Cont'd)

Fig. 2: STATIC CHARACTERISTICS

**Conduction losses :**

$$P1 = V_{t0} \cdot I_F(AV) + R_d \cdot I_F^2(\text{RMS})$$

with

$$V_{t0} = 1.15 \text{ V}$$


$$R_d = 0.011 \text{ Ohm}$$

(Max values at 125°C)

Reverse losses :

$$P2 = V_R \cdot I_R \cdot (1 - \delta)$$

Fig. 3: TURN-OFF CHARACTERISTICS

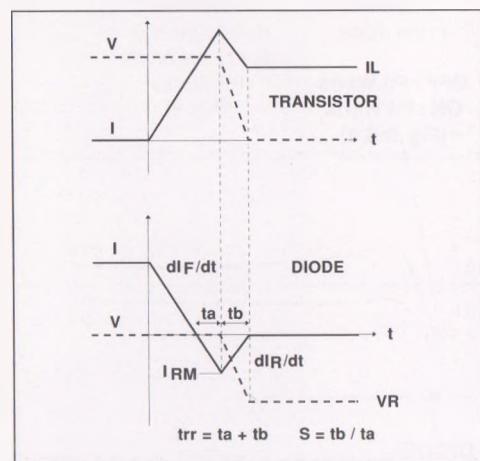**Turn-on losses :**

(in the transistor, due to the diode)


$$P5 = \frac{V_R \times I_{RM}^2 \times (3 + 2 \times S) \times F}{6 \times dI/dt} + \frac{V_R \times I_{RM} \times I_L \times (S + 2) \times F}{2 \times dI/dt}$$

Turn-off losses (in the diode) :

$$P3 = \frac{V_R \times I_{RM}^2 \times S \times F}{6 \times dI/dt}$$

P3 and P5 are suitable for power MOSFET and IGBT

Fig. 4: TURN-ON CHARACTERISTICS

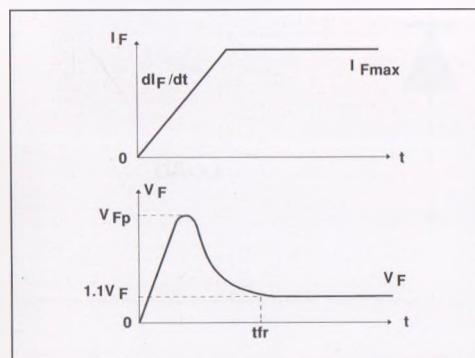**Turn-on losses :**

$$P4 = 0.4 (V_{FP} - V_F) \cdot I_{F\max} \cdot t_{fr} \cdot F$$

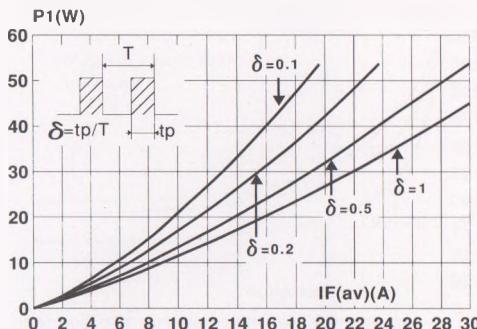
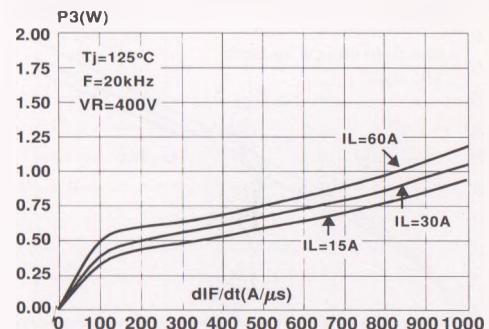
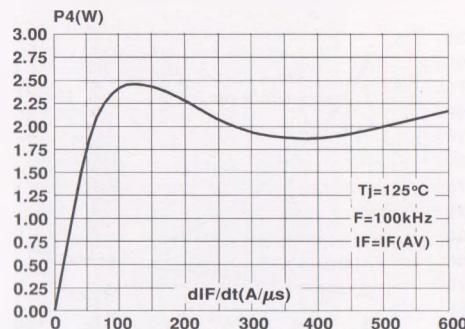
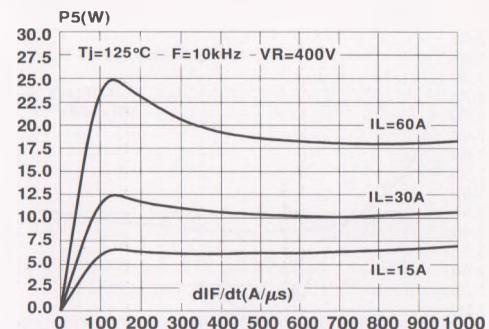
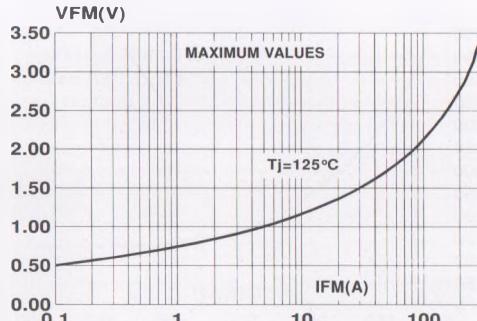
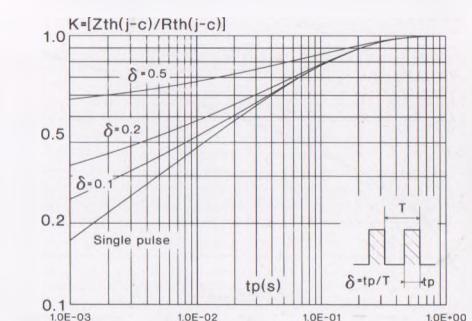
Fig 5 : Conduction losses versus average current**Fig 6 : Switching OFF losses versus dIF/dt****Fig 7 : Switching ON losses versus dIF/dt****Fig 8 : Switching losses in transistor due to the diode****Fig 9 : Forward voltage drop versus forward current****Fig 10 : Relative variation of thermal transient impedance junction to case versus pulse duration**

Fig 11 : Peak reverse recovery current versus dI/dt

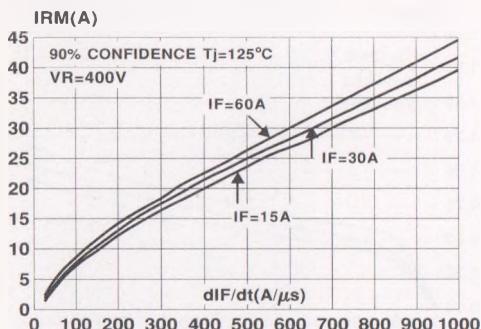


Fig 12 : Reverse recovery time versus dI/dt

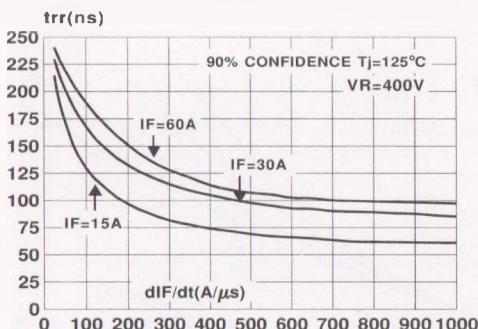


Fig 13 : Softness factor (t_b/t_a) versus dI/dt

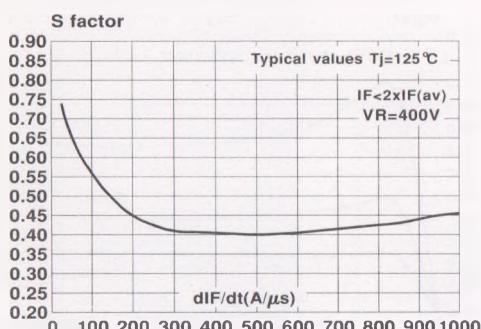


Fig 14 : Relative variation of dynamic parameters versus junction temperature (Reference $T_j=125^\circ\text{C}$)

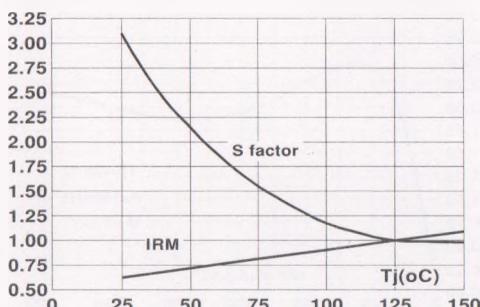


Fig 15 : Transient peak forward voltage versus dI/dt

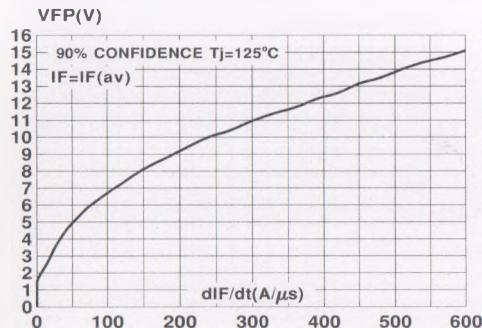


Fig 16 : Forward recovery time versus dI/dt

